
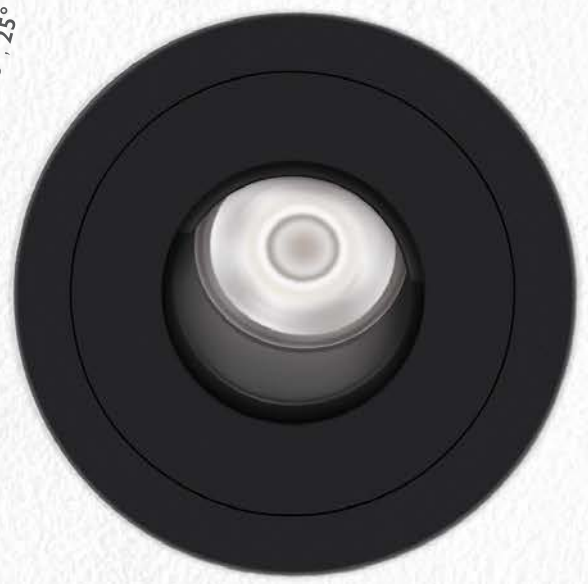


MINIMO

RECESSED

PRECISION
LIGHTING

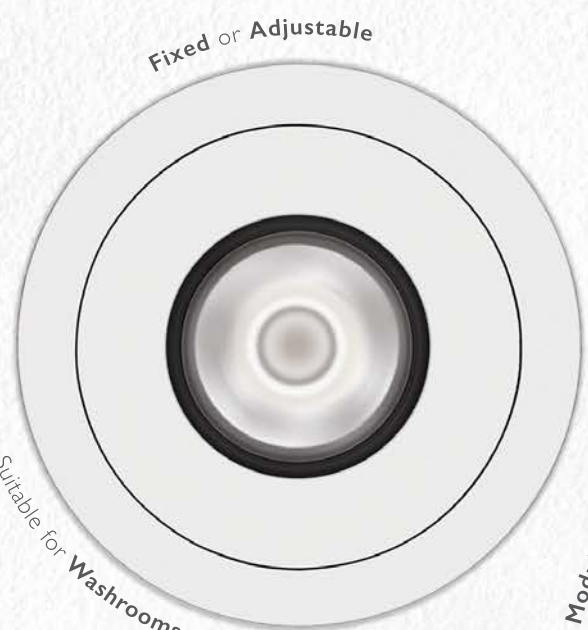

Fixed or Adjustable

Suitable for Washrooms

Modular design - available Trimless

360° rotation - 35° tilt

1:1 Actual size

Site changeable optics - 9°, 11°, 15°, 25° and 45°

01

-

About

03

-

Minimo 11 & 16

13

-

IP54 Options

15

-

Minimo 1

21

-

Case Studies

25

-

Applications

27


-

Minimo 11 & 16
Specification Guide

41

-

Minimo 1
Specification Guide

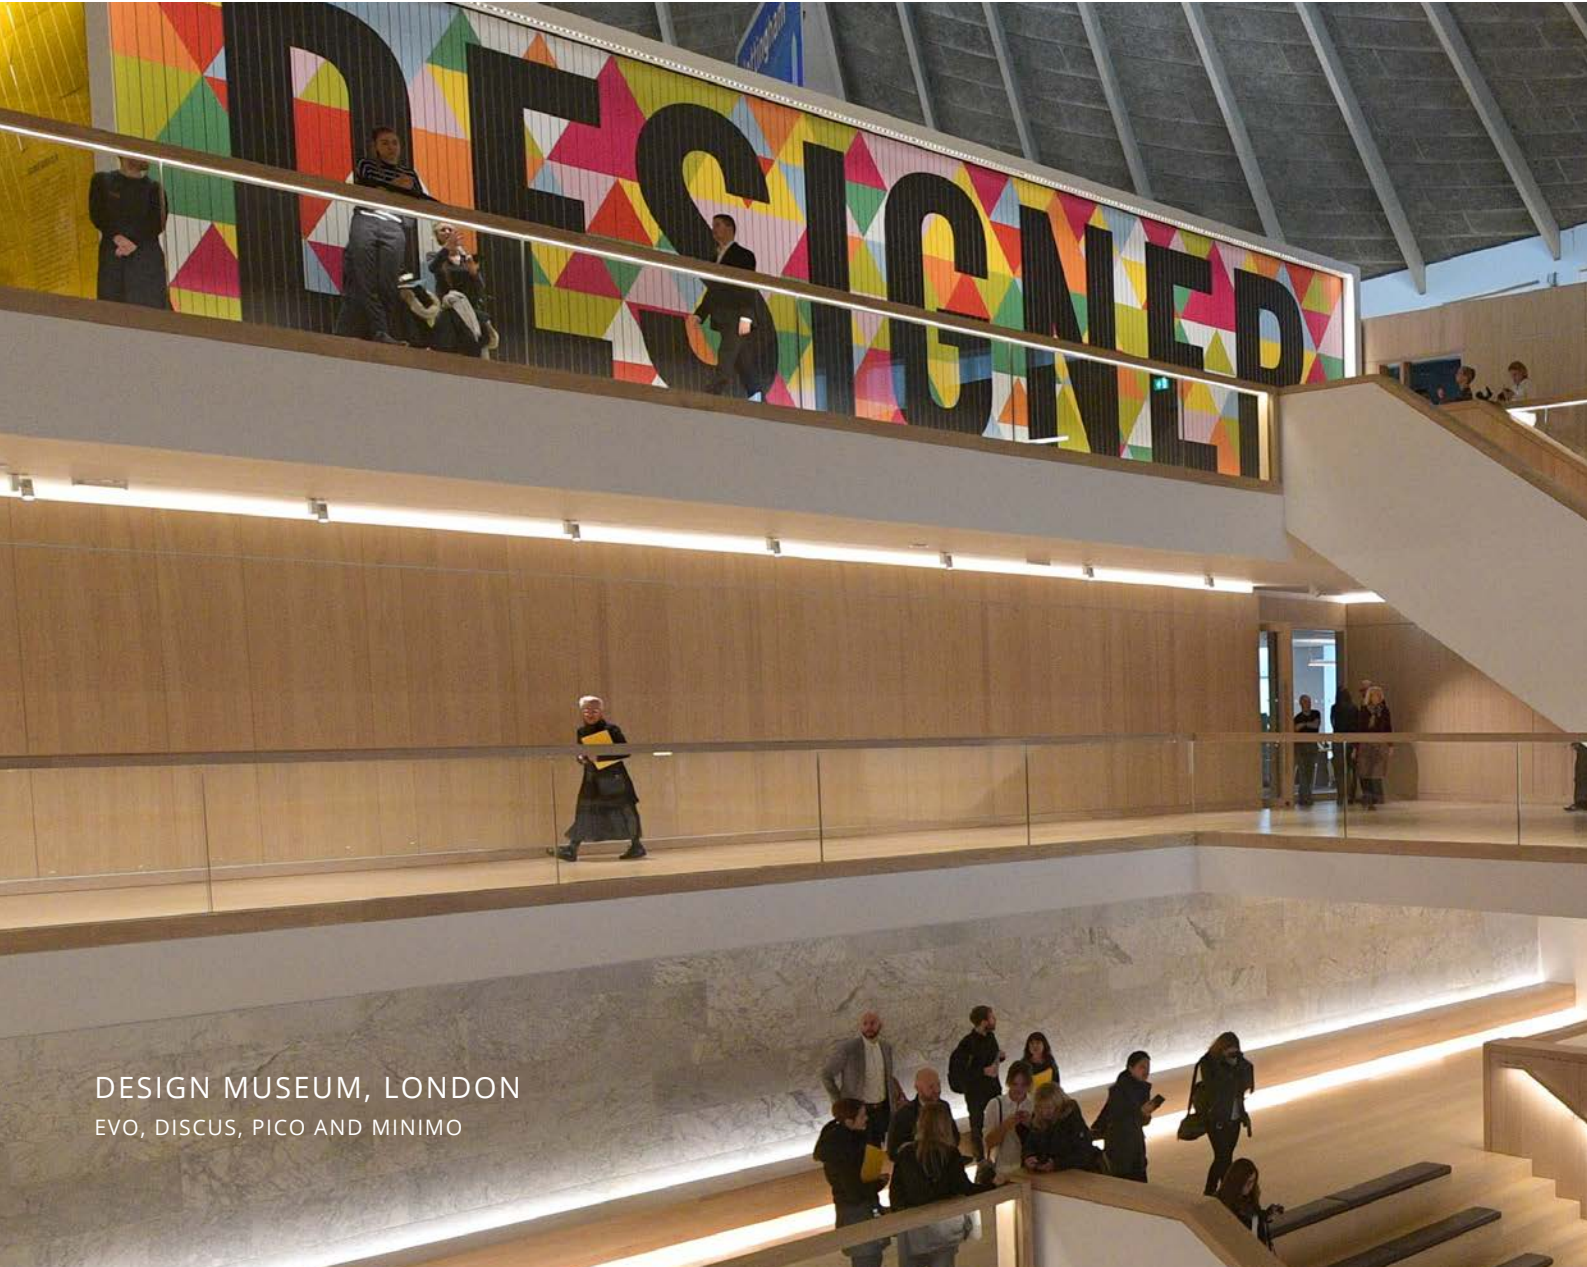

DESIGN MUSEUM, LONDON
EVO, DISCUS, PICO AND MINIMO

Precision Lighting is a British manufacturer with a proud history of collaborating with architects, lighting designers, interior designers and end-clients to deliver architectural luminaires and lighting systems that combine **optical excellence** with refined aesthetics.

Our attention to detail drives us to create best-in-class lighting solutions, with a focus on delivering highly efficient, elegant luminaires without compromising on the demand for outstanding optical performance. From concept design through to the delivery of a finished product, our in-house R+D team is committed to the development of luminaires and systems that deliver for specifiers and end-users alike.

This passion extends to Precision's bespoke solutions team, who work with our customer base to develop truly unique architectural lighting solutions for a range of applications.

Precision recognises that lighting performance is key for any application, which is why our luminaires are designed for superior beam quality, and, thanks to our carefully selected LEDs, offer exceptional colour rendering. We understand that our clients need flexibility when planning lighting scenarios, which is why all of our fixtures feature interchangeable optics with a choice of beam distributions.



We believe that luminaires and systems should compliment the design vision of the project, so all of our products are designed to a minimal aesthetic, and with a range of finishes and mounting options, they offer seamless architectural integration.

It is this fusion of technical performance and aesthetic integration that has led us to develop the expanded Minimo range. A truly flexible family of compact recessed architectural luminaires, Minimo is a highly configurable luminaire with a wide choice of bezel, insert options and finishes for a completely individual style, whilst fulfilling technical requirements with interchangeable beam angles and superior colour rendering.



MINIMO 11 | FIXED
WHITE FLAT BEZEL | SATIN BRASS CHAMFERED APERTURE

MINIMO

11 & 16

Minimo 11 and Minimo 16 are the latest addition to Precision Lighting's **recessed LED** portfolio.

Both Minimo 11 and Minimo 16 are incredibly versatile, allowing architects and designers a choice of lumen outputs alongside an array of aesthetics, apertures, beam distributions and colour temperatures, all from the same luminaire footprint. This flexibility across the range enables complete architectural integration, ideal for a number of applications.

PERFORMANCE

MINIMO 11 & 16

SINGLE SOURCE LEDS FOR SUPERIOR OPTICAL PERFORMANCE

Minimo 11 and Minimo 16 offer an incredibly efficient lumen output from a single source LED light engine. Minimo 11 delivers 513lm at 6W and Minimo 16 delivers 665lm at 8.4W.

The combination of a single LED and silicone optic produces clean, even shadows, and avoids the unsightly multi-shadowing effect cast from objects. It also enables us to recess the module extremely deeply into the overall product for excellent glare control.

There is also the option of installing a louvre for further glare control or other lenses and filters as required.

COLOUR

Minimo 11 and Minimo 16 are available in two colour temperatures as standard: 2700K and 3000K. Both deliver excellent colour rendering of 92CRI. Our unique light engine ensures an even homogenous colour across the beam. Further colour temperature options are available upon request.

HIGH PEAK INTENSITY

Careful consideration of optics has resulted in 5 beam choices, from the high peak intensity narrow 9° spot through to a 45° wide flood.

Minimo 11 and Minimo 16 are highly efficient due to the combination of a single high intensity LED, silicone optic and high transmission microlens, delivering exceptional peak intensity of up to 21.8cd/lm.

Our unique light engine eliminates the double-ring effect of a pronounced field beam, a common occurrence with reflector based products, creating a clean light distribution ideal for all applications.



MINIMO 16 | TILT
WHITE FLAT BEZEL | BLACK CHAMFERED APERTURE

DISTRIBUTION OPTIONS


MINIMO 11 & 16

INTERCHANGEABLE BEAM ANGLES

All variants of Minimo 11 and Minimo 16 support tool-less interchangeable beam angles, allowing for flexible on-site alterations to the light distribution.


The five standard distribution options range from narrow spot to wide flood: 9°, 11°, 15°, 25° and 45°.

9 DEGREE

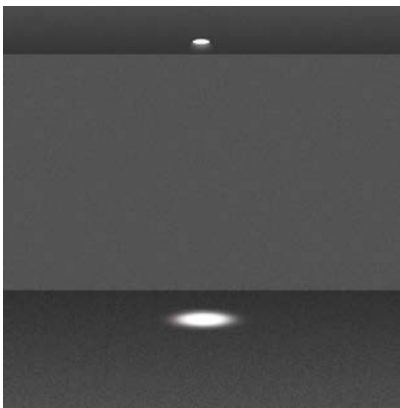


| | | | Minimo 11 | Minimo 16 |
|----|-------|--|-----------|-----------|
| 1m | 0.16m | | 11,214 lx | 14,533 lx |
| 2m | 0.31m | | 2,804 lx | 3,633 lx |
| 3m | 0.47m | | 1,246 lx | 1,615 lx |
| 4m | 0.63m | | 701 lx | 908 lx |
| 5m | 0.79m | | 449 lx | 581 lx |

11 DEGREE

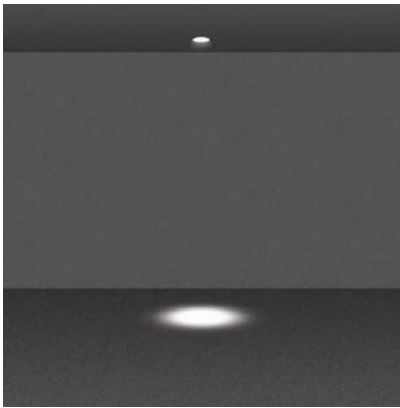


| | | | Minimo 11 | Minimo 16 |
|----|-------|--|-----------|-----------|
| 1m | 0.19m | | 8,614 lx | 11,164 lx |
| 2m | 0.39m | | 2,154 lx | 2,791 lx |
| 3m | 0.58m | | 957 lx | 1,240 lx |
| 4m | 0.77m | | 538 lx | 698 lx |
| 5m | 0.96m | | 345 lx | 447 lx |

15 DEGREE

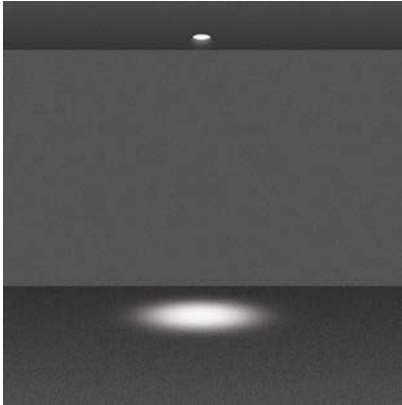


| | | Minimo 11 | Minimo 16 |
|----|-------|-----------|-----------|
| 1m | 0.26m | 4,666 lx | 6,047 lx |
| 2m | 0.53m | 1,167 lx | 1,512 lx |
| 3m | 0.79m | 518 lx | 672 lx |
| 4m | 1.05m | 292 lx | 378 lx |
| 5m | 1.32m | 187 lx | 242 lx |

25 DEGREE

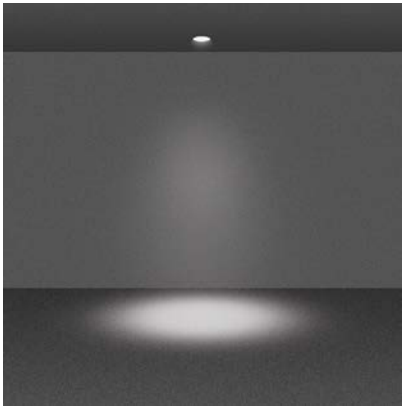

| | | Minimo 11 | Minimo 16 |
|----|-------|-----------|-----------|
| 1m | 0.44m | 1,416 lx | 1,724 lx |
| 2m | 0.89m | 354 lx | 431 lx |
| 3m | 1.33m | 157 lx | 191 lx |
| 4m | 1.77m | 89 lx | 108 lx |
| 5m | 2.22m | 57 lx | 69 lx |

45 DEGREE

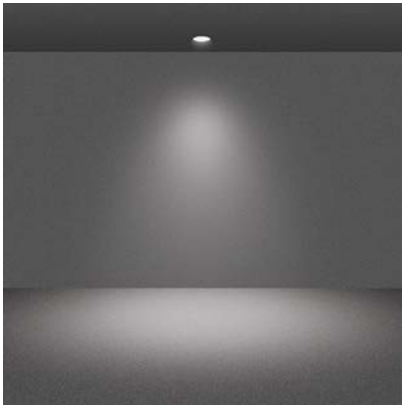

| | | Minimo 11 | Minimo 16 |
|----|-------|-----------|-----------|
| 1m | 0.83m | 470 lx | 609 lx |
| 2m | 1.66m | 117 lx | 152 lx |
| 3m | 2.49m | 52 lx | 68 lx |
| 4m | 3.31m | 29 lx | 38 lx |
| 5m | 4.14m | 19 lx | 24 lx |

MINIMO 11&16

FIXED OR ADJUSTABLE

Offering two lumen output options from the **same ceiling cut-out** dimensions, Minimo 11 and Minimo 16 are both available as fixed or adjustable recessed luminaires.


Based on this footprint, both fixed and adjustable share the same bezel, insert and finish options, allowing for a consistent aesthetic regardless of the version specified. This allows for easy installation and flexibility in lighting schemes.

FIXED

Minimo 11 and Minimo 16 Fixed are compact, fully-recessed LED luminaires, designed for high performance downlighting and offering effective glare control.

ADJUSTABLE

Minimo 11 and Minimo 16 Adjustable are compact, fully recessed directional LED luminaires, offering 35° tilt and complete 360° pan rotation after installation. Even at full tilt, no part of the luminaire protrudes below the bezel, ensuring a discreet appearance and clean ceiling line.

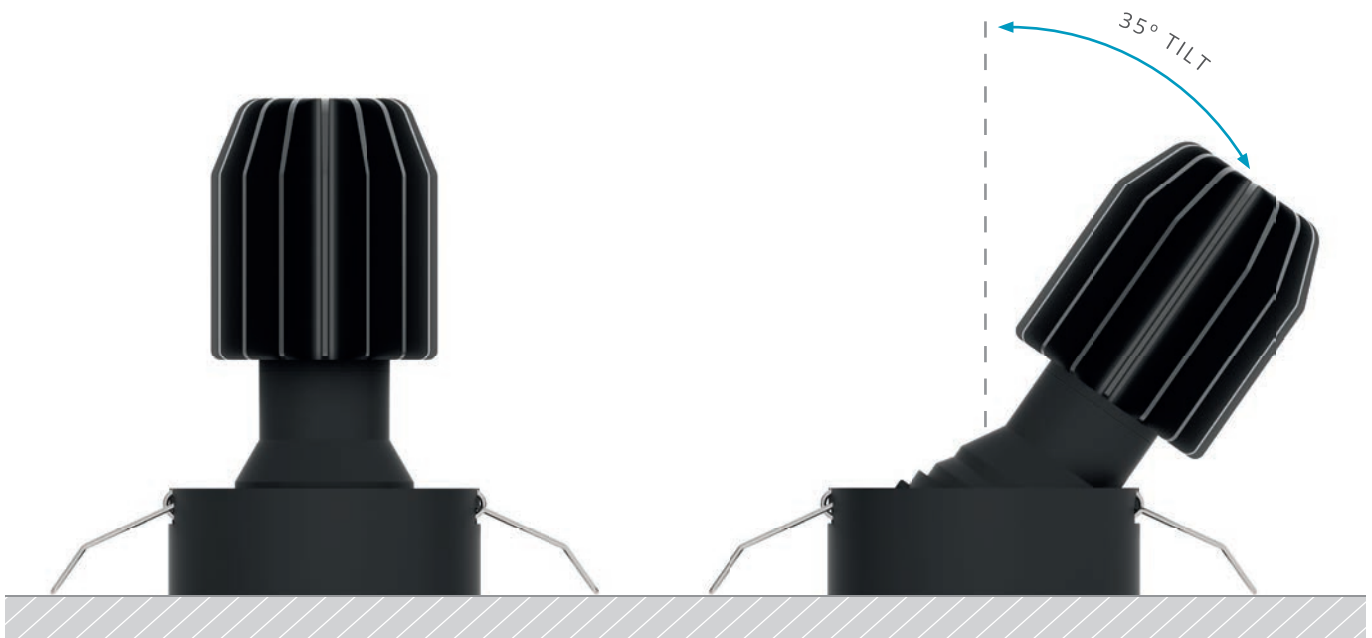

MINIMO 11/16
FIXED



MINIMO 11/16
ADJUSTABLE

AESTHETIC OPTIONS

Both Minimo 11 and Minimo 16 offer a variety of outer trim and insert combinations with a **wide selection of finishes**; including antique rubbed bronze, matte black and polished brass.

CHAMFERED BEZEL

A chamfered option for the Minimo 11 and Minimo 16 bezel offers an elegant surround for the recessed luminaire and is available in a choice of six finishes, including white, black and rubbed bronze.

TRIMLESS

The trimless bezel offers an incredibly minimal solution for Minimo 11 and 16. The trimless mounting hardware allows for convenient magnetic installation of the luminaire module once the ceiling has been plastered.

FLAT BEZEL


The flat bezel option for Minimo 11 and Minimo 16 offers a discreet, flush finish for a minimal aesthetic. The flat bezel is available in a choice of six finishes, including white, black and rubbed bronze.

DECORATIVE INSERT

Echoing the classic lines of traditional recessed luminaires, the interchangeable chamfered insert is available in a choice of three finishes: black, white and satin brass.

PINHOLE INSERT

Available as standard in black and white, with an aperture of just ø34mm, the pinhole insert for both Minimo 11 and 16 combines an elegant and discreet aesthetic with excellent glare control.

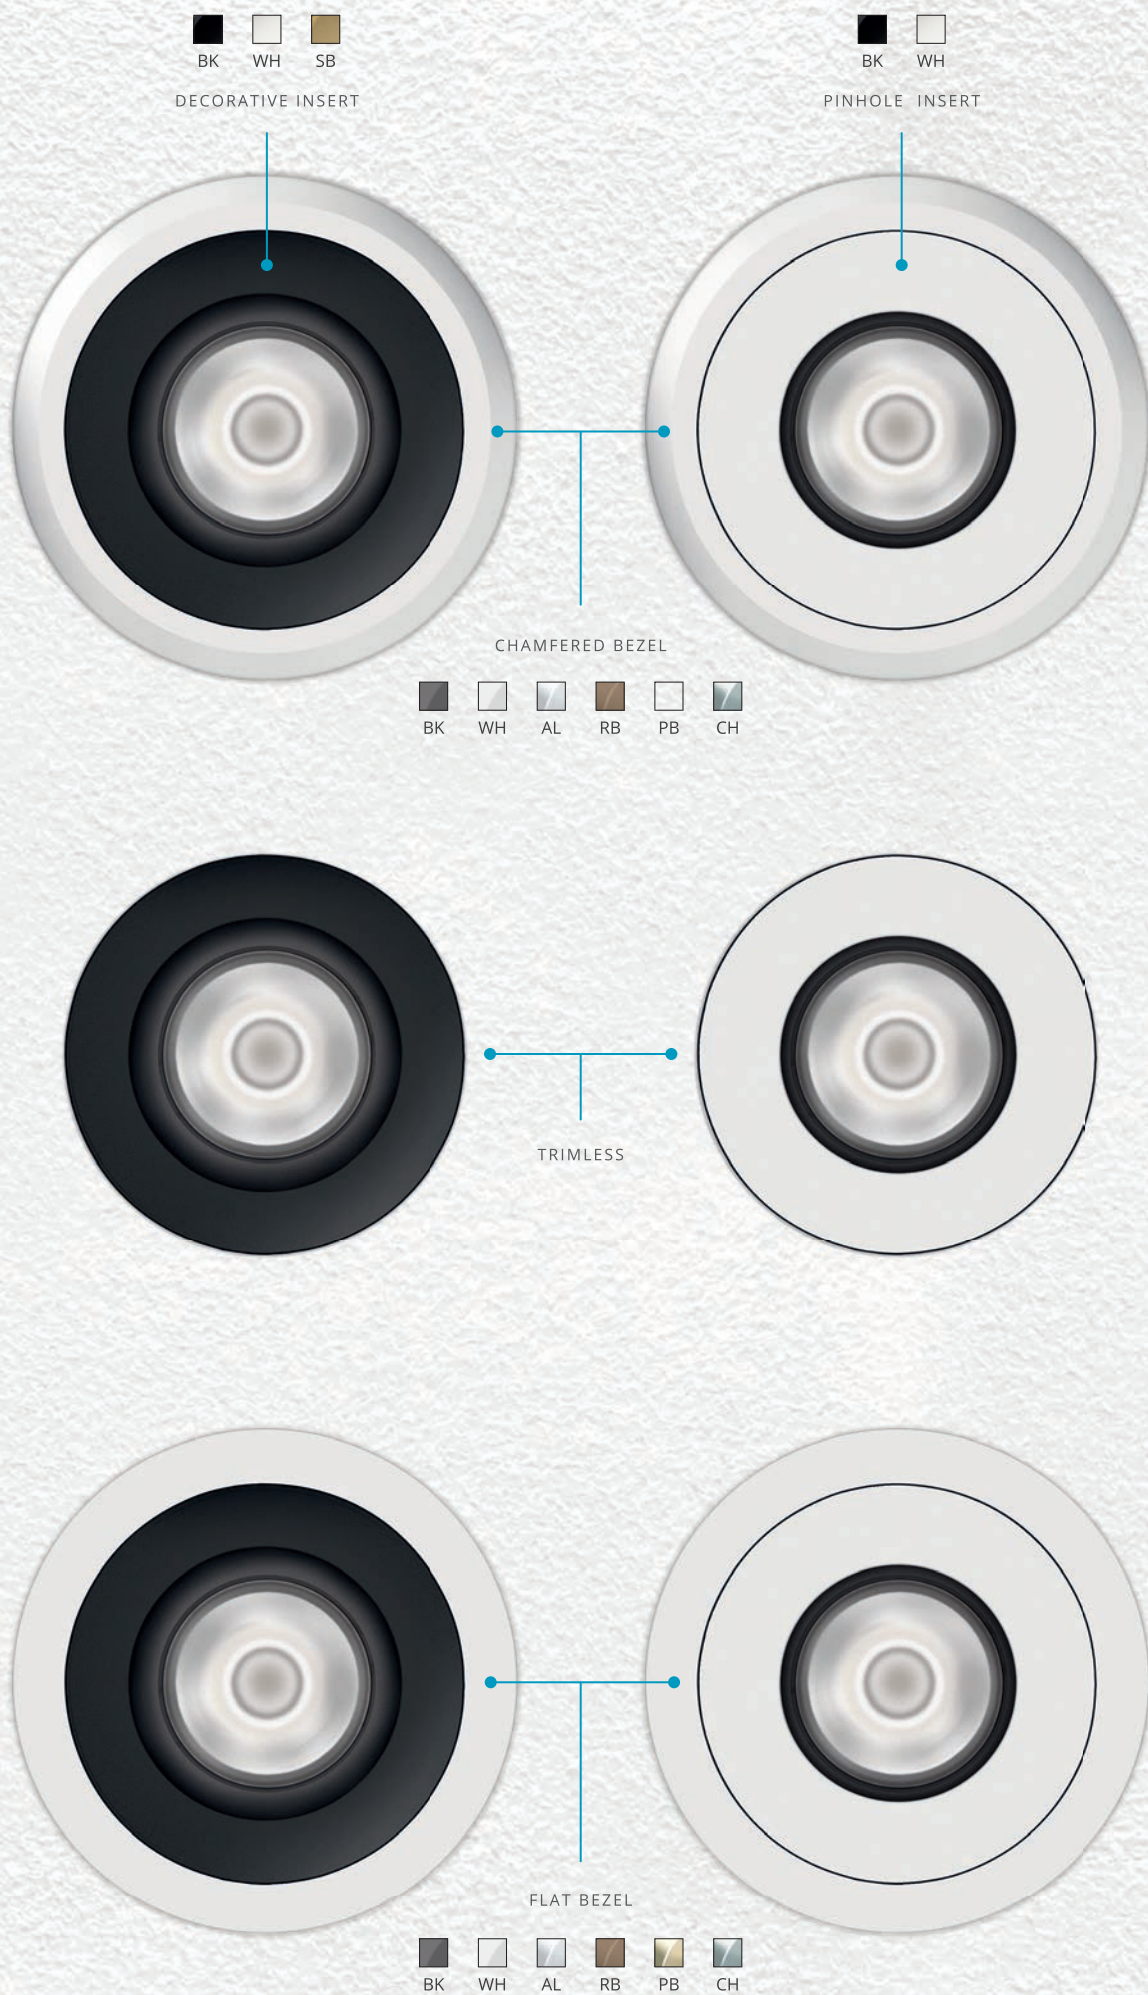

IP54 OPTIONS


MINIMO 11 & MINIMO 16



All configurations of Minimo 11 and Minimo 16, in addition to Minimo 1 Fixed, are available as **IP54 rated** recessed luminaires.

This high level of ingress protection makes the Minimo family a perfect solution for environments where there is potential water spray contact, such as washrooms.

With a shared aesthetic, Minimo is ideal for projects demanding a cohesive lighting scheme across general and wet-room environments.

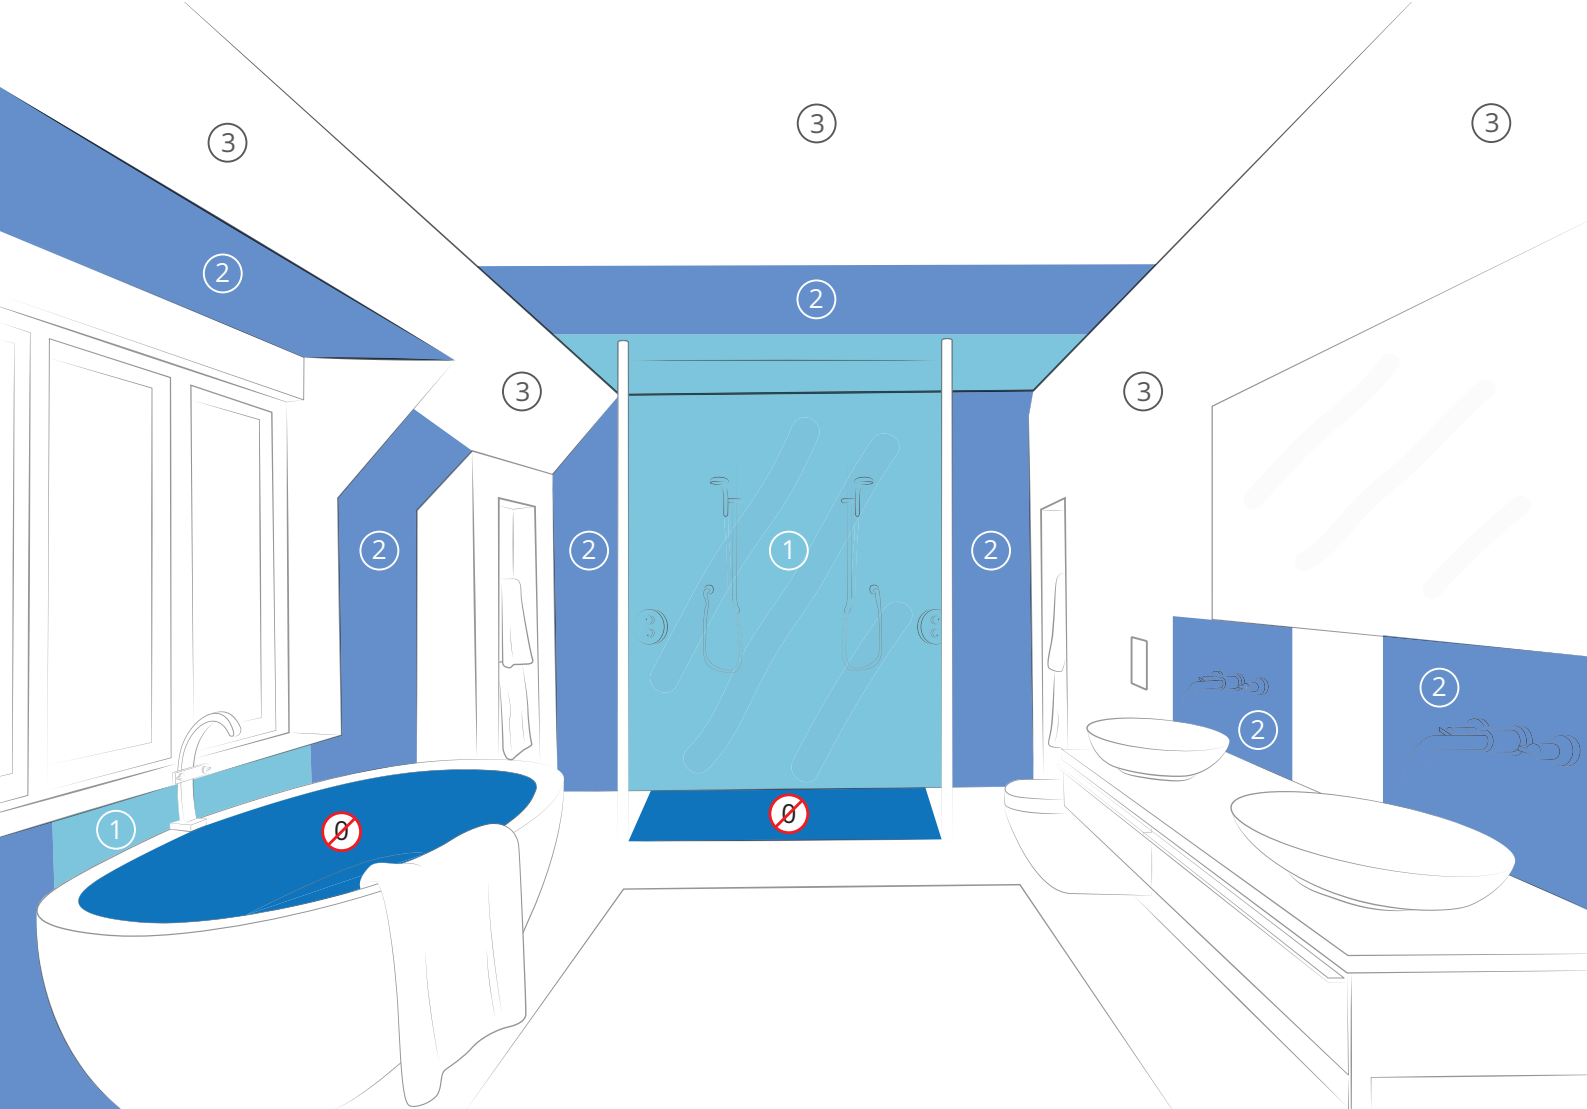

- 1 ☒ For areas directly above a bath unit or within a shower cubicle where luminaires are expected to get wet, but not submerged, a minimum requirement of IPX4 is required. IP54 versions of Minimo 11, 16 and 1 are suitable for this zone. If the fixture is likely to be subjected to jets of water IPX5 is required (e.g. sidewalls of shower).

- 3 ☒ There is no requirement for IP-rated luminaires for zones other than 0, 1 and 2, so in addition to IP54 rated variants of Minimo 1, 11 and 16, the full portfolio is available for use in these areas, allowing complete aesthetic cohesion.

- 2 ☒ IPX4 luminaires are required for areas surrounding the bath or shower unit to a distance of 0.6m from the edge of Zone 1.

- 0 ☒ Zone 0 requires IPX7 for total immersion within a bath or shower unit. Minimo is not suitable for this zone.



MINIMO 1 TILT
WHITE BEZEL

MINIMO

I

Precision Lighting are renowned for the **miniaturisation** of sophisticated lighting technologies, and Minimo I is another excellent example of this capability.

An extremely compact recessed luminaire family, Minimo I offers an incredibly efficient lumen output from a 1.6W LED module, delivering 124lm and achieving an energy saving of 84% compared to conventional lamps of a similar illuminance. Minimo offers a choice of three interchangeable optics (12°, 30°, 60°) and additional Tilt and Eye versions are available for flexible beam control.



MINIMO 1 EYE



MINIMO 1 FIXED



MINIMO 1 TILT

COHESIVE AESTHETIC

The Minimo 1 includes a Fixed, a Tilt and an Eye variant, all sharing the same design language; allowing specifiers and designers to develop schemes with a cohesive aesthetic, while still meeting functional needs.

SINGLE SOURCE LED

As with Minimo 11 and Minimo 16, the Minimo 1 family uses a single source LED module to combine exceptional beam quality and colour rendering with effective glare control.

CONFORMS TO ANY INTERIOR VISION

All of these features are packed into a minimally styled luminaire that has been engineered to meet all aesthetic considerations. Multiple bezel options, including discreet flat bezels and trimless variants, and a choice of six exquisite finish options as standard are combined in a family that has a remarkably small footprint. Custom bezels are also an option for specific architectural requirements.



MINIMO 1 FIXED CIRCULAR | Ø40MM
BRUSHED ALUMINIUM



MINIMO 1 FIXED CIRCULAR | Ø40MM
RUBBED BRONZE



MINIMO 1 FIXED CIRCULAR | Ø40MM
POLISHED BRASS



MINIMO 1 FIXED TRIMLESS | Ø24MM
MATTE BLACK




MINIMO 1 FIXED SQUARE | 40MM
WHITE

MINIMO 1 FIXED


The Fixed variants of Minimo I offer a perfectly formed recessed downlight, engineered for high performance and effective glare control, with IP54 versions also available for washrooms.

Available in chamfered and flat bezel options, plus a trimless mounting version for maximum architectural integration, the Fixed versions of the Minimo I family have been designed to meet the aesthetic requirements of any scheme. With six bezel finishes and interchangeable insert options, the range integrates with any interior style.

CIRCULAR / SQUARE

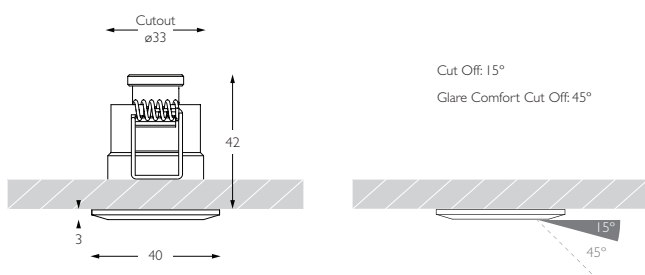

TRIMLESS

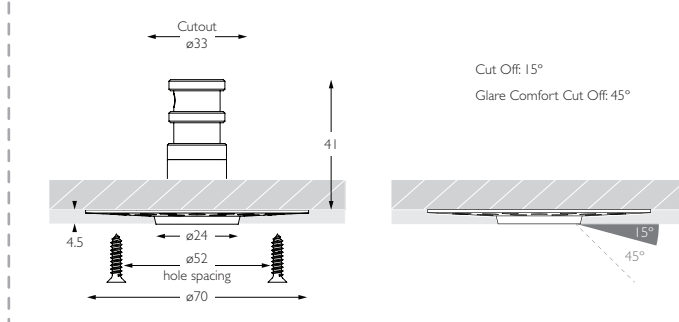



MINIMO 1 TILT | Ø50MM
POLISHED BRASS



MINIMO 1 TILT TRIMLESS | Ø46MM
WHITE





MINIMO 1 TILT | Ø50MM
BLACK

MINIMO 1 TILT

Minimo Tilt offers a similar aesthetic to Minimo Fixed, but with added flexibility in design. With a tilt angle of 25° and the same choice of three optics as the rest of the family, Minimo Tilt gives designers control while maintaining a minimal aesthetic.

Common across the range is the dedication to ensure architectural integration, and with Minimo 1 Tilt, designers have a highly flexible yet discreet recessed luminaire that does not break the ceiling line, even at full tilt.

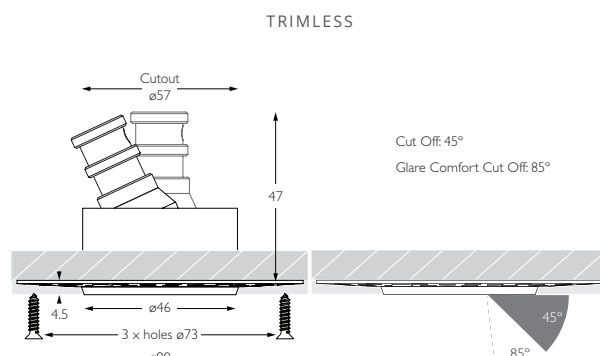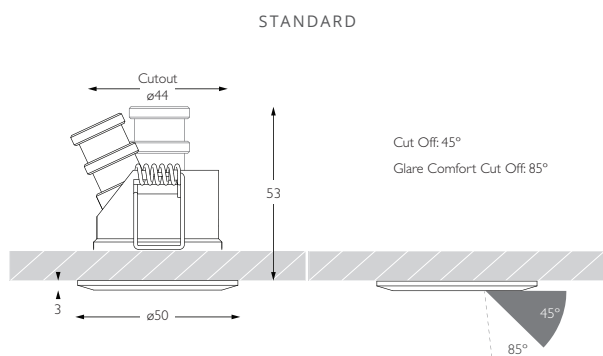



MINIMO 1 EYE | Ø52MM
WHITE




MINIMO 1 EYE | Ø52MM
BLACK

MINIMO 1 EYE

The Minimo 1 Eye is the most versatile of the Minimo 1 family, offering complete flexibility for designers, while maintaining the common aesthetic.

Minimo 1 Eye offers smooth rotation through 360° after installation and a maximum tilt angle of 30°, providing opportunities for high quality accent lighting in changing lighting scenes.

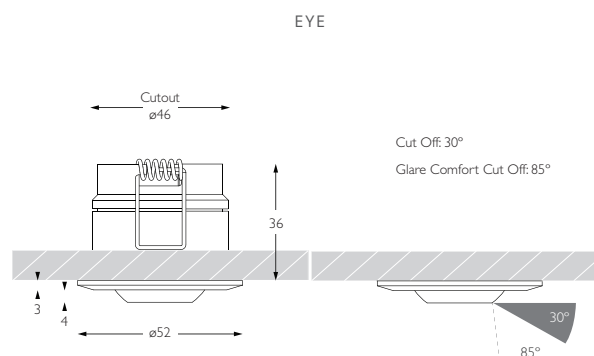

THE LIGHTERMAN

KING'S CROSS, LONDON

Located at Granary Square, King's Cross, the Lighterman is a new public house and restaurant offering stunning views over Regent's Canal across three floors, that has been beautifully lit with Precision Lighting luminaires.

The Lighterman, the third restaurant from developers Open House, offers a relaxed ambience where all-day dining can be enjoyed by patrons, with breakfast, lunch and dinner menus carefully crafted by chef Diego Cardoso. Working closely with interior designer Coote and Bernardi, Precision were entrusted to deliver a lighting scheme that offered subtlety, flexibility and aesthetic cohesion.

Track-mounted spotlights from Precision's Discus and Pico family were used for lighting of the dining tables and offer discreet accent lighting. Further lighting was provided from a number of Tilt and Eye variants from the Minimo I family.

Both recessed fixtures were provided in a rich, black finish to match the interior architecture while their compact size offered an elegant minimalist appeal.

The compact Minimo I Tilt luminaires offer versatility and consistent beam focus, while respecting the interior aesthetic; even at the full 25° tilt, the luminaire does not protrude below the bezel.

The Minimo I Eye variant was chosen for the flexibility it brought to the scheme, with up to 30° tilt, and full 360° pan rotation after installation.



NATURAL HISTORY MUSEUM

LONDON

The development of humanity itself is charted in the Natural History Museum's latest permanent gallery, Human Evolution. Luminaires from Precision's Minimo and Pico families light this extraordinary story in an enchanting scheme by Studio ZNA.

For the lighting of a series of five skulls and matching facial reconstructions demonstrating the changing structure and facial qualities of our ancestors, ten miniature recessed luminaires from the Minimo I family were specified.

The Minimo I Eye luminaires cast tight spots over the skulls and reconstructions, perfectly capturing the unique and defining features in each head, allowing the visitors to the exhibition to easily understand the facial development in the specimens on display.

Given that the precise location of each skull was not known by Studio ZNA before commissioning, the Minimo I Eye's flexibility after installation was a crucial benefit.

With a choice of three tool-less interchangeable optics, full 360° rotation through the pan, and a maximum tilt of 30°, the Minimo I Eye has been designed for versatility without affecting the discreet and elegant design.

The glare control of the Minimo I family also paid dividends for Studio ZNA, as the fixtures could be installed adjacent to the main thoroughfare of the exhibition, while avoiding intrusive glare for visitors.




APPLICATIONS

The Minimo family contains an extremely **versatile and diverse** range of luminaires that are suitable for a vast number of applications.


The smallest products in the range have found use in many Museum and Retail applications, lighting exhibits and jewellery in particular. These are an ideal replacement for cumbersome fibre optic systems. The larger Minimo 11 and 16 due to their size, range of beam angles and single source light engine have been retrofitted into existing schemes that used traditional Halogen sources as well as other LED products.

Due to the vast variety of finishes and common aesthetic across the entire family, along with our flexibility to produce custom finishes, Minimo is perfect for applications that require a combination of luminaire solutions without having to sacrifice on appearance. Not only this, but Minimo is also an ideal choice for new build interiors as well, matching other architectural elements or furniture.

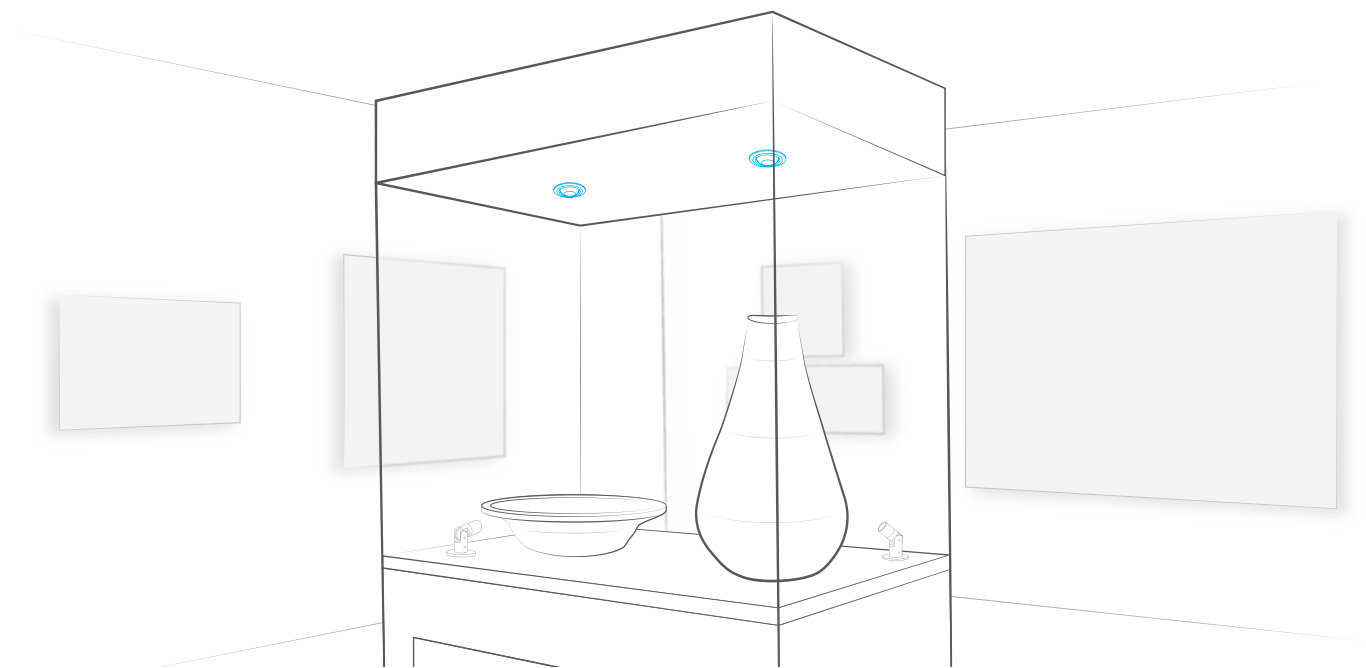


APPLICATION: MUSEUM

PICO AND MINIMO 1

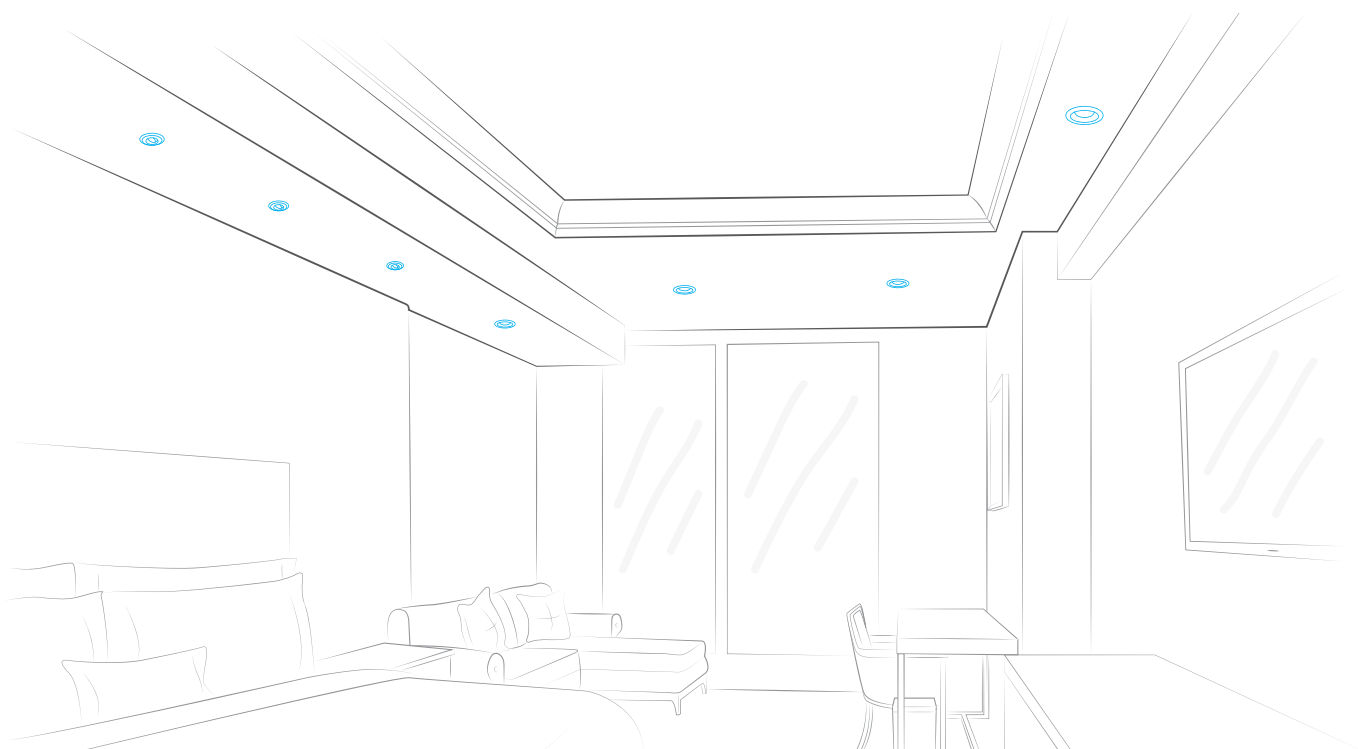

APPLICATION: HOTEL

ENTIRE MINIMO FAMILY

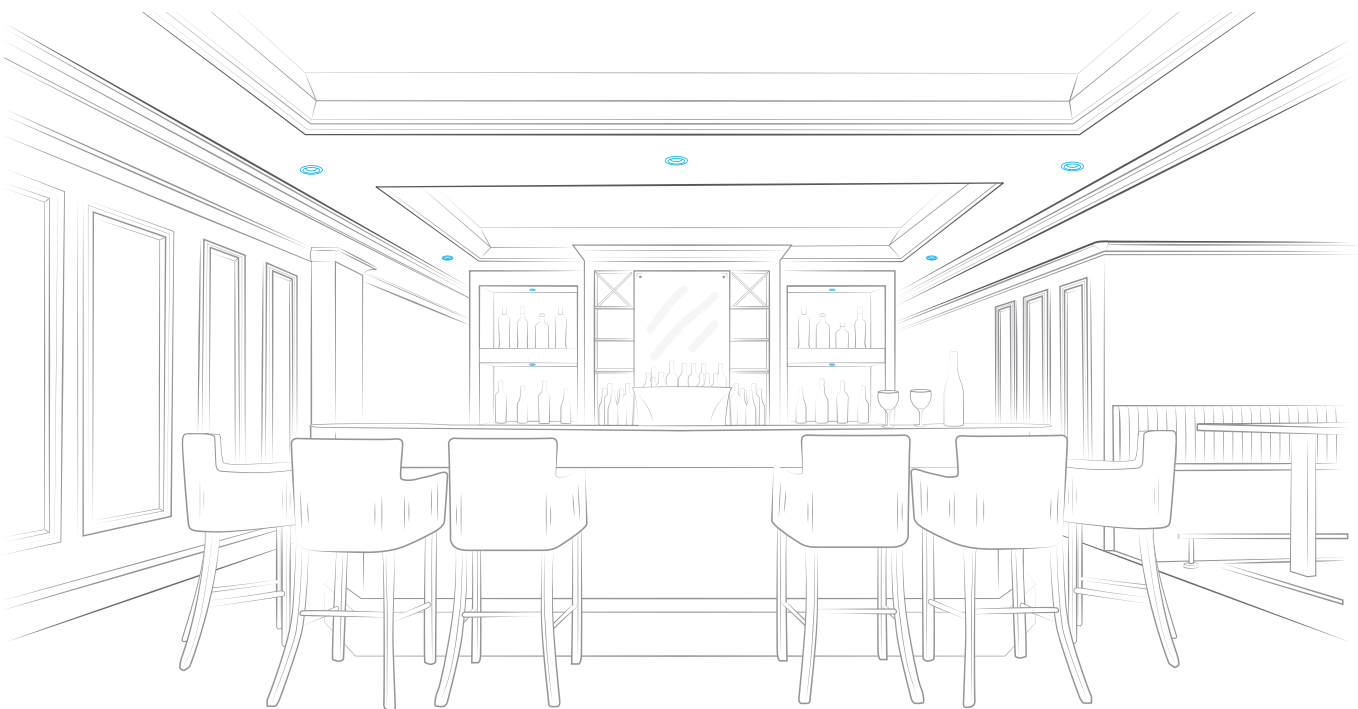

APPLICATION: BAR

MINIMO PRO 11/16 AND MINIMO 1

SPECIFICATION GUIDE

MINIMO 11 & 16

This guide is to help **identify product codes** in order to specify our luminaires.

As can be seen below, product codes are comprised of various combinations of letters and numbers which relate to fixture, bezel and aperture finish, colour temperature, CRI and beam angle.


For example, specifying a 9° 3000K Minimo Pro Fixed I6 with a black flat bezel and white decorative insert would mean that the product code would be RCD-631-WH-BK-309209. At the bottom of each specification page is a key in order to make the process simple and easy to understand.

The adjacent diagram showcases the vast customisation possibilities of the Minimo Pro range and highlights the versatility of this modular luminaire.


| LUMINAIRE CODE | BEZEL FINISH | APERTURE FINISH | CCT | CRI | BEAM ANGLE |
|----------------|--|---|---|----------------------|------------------------------------|
| RC-605 | <div>AL Brushed Aluminium</div> <div>WH White</div> <div>BK Black</div> <div>RB Rubbed Bronze</div> <div>PB Polished Brass</div> <div>CH Polished Chrome</div> | <div>BK Black</div> <div>WH White</div> <div>SB Satin Brass</div> | <div>27 2700K</div> <div>30 3000K</div> | <div>92 92 CRI</div> | <div>09 9° Ultra Narrow Spot</div> |
| RC-605 | - | - | - | 92 | 09 |

MINIMO PRO RANGE CONFIGURATOR

MODULE




RC-605-Module
Minimo 11 Module




RC-631-Module
Minimo 16 Module

HOUSING




RC-605-Housing
Fixed Housing





RC-623-Housing
Tilt Housing



BEZEL



RC-605-I0
Chamfered Bezel




RCD-605-I0
Flat Bezel





RCT-605-I0-ASM
Trimless Bezel ASM





INSERT





RC-605-II-ASM
Chamfered Insert



RC-606-II-ASM
Pinhole Insert




RC-607-II-ASM
Chamfered Insert IP54




RC-608-II-ASM
Pinhole Insert IP54





MINIMO PRO FIXED CHAMFERED BEZEL WITH DECORATIVE INSERT

A static recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Chamfered bezel with decorative insert.

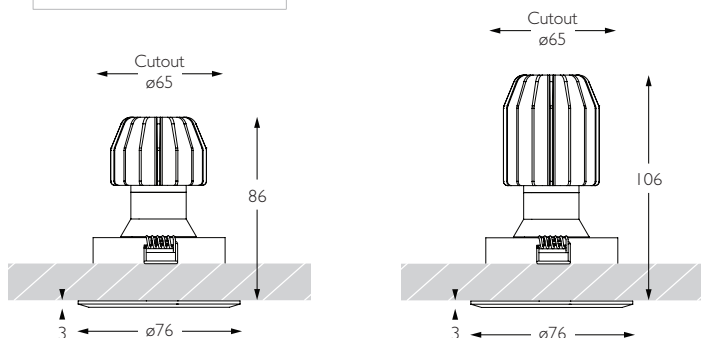

| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White Aluminium Brass Bronze Chrome |
| Adjustability | Static |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|--|--|----------|----------|--|
| RC-605-AL-BK-YY92ZZ RC-607-AL-BK-YY92ZZ | RC-631-AL-BK-YY92ZZ RC-633-AL-BK-YY92ZZ | AL AL | BK BK | |
| RC-605-WH-WH-YY92ZZ RC-607-WH-WH-YY92ZZ | RC-631-WH-WH-YY92ZZ RC-633-WH-WH-YY92ZZ | WH WH | WH WH | |
| RC-605-WH-BK-YY92ZZ RC-607-WH-BK-YY92ZZ | RC-631-WH-BK-YY92ZZ RC-633-WH-BK-YY92ZZ | WH WH | BK BK | |
| RC-605-WH-SB-YY92ZZ RC-607-WH-SB-YY92ZZ | RC-631-WH-SB-YY92ZZ RC-633-WH-SB-YY92ZZ | WH WH | SB SB | |
| RC-605-BK-BK-YY92ZZ RC-607-BK-BK-YY92ZZ | RC-631-BK-BK-YY92ZZ RC-633-BK-BK-YY92ZZ | BK BK | BK BK | |
| RC-605-BK-SB-YY92ZZ RC-607-BK-SB-YY92ZZ | RC-631-BK-SB-YY92ZZ RC-633-BK-SB-309209 | BK BK | SB SB | |
| RC-605-RB-BK-YY92ZZ RC-607-RB-BK-YY92ZZ | RC-631-RB-BK-YY92ZZ RC-633-RB-BK-YY92ZZ | RB RB | BK BK | |
| RC-605-RB-SB-YY92ZZ RC-607-RB-SB-YY92ZZ | RC-631-RB-SB-YY92ZZ RC-633-RB-SB-YY92ZZ | RB RB | SB SB | |
| RC-605-PB-BK-YY92ZZ RC-607-PB-BK-YY92ZZ | RC-631-PB-BK-YY92ZZ RC-633-PB-BK-YY92ZZ | PB PB | BK BK | |
| RC-605-CH-BK-YY92ZZ RC-607-CH-BK-YY92ZZ | RC-631-CH-BK-YY92ZZ RC-633-CH-BK-YY92ZZ | CH CH | BK BK | |



KEY

YY = COLOUR TEMPERATURE (E.G. 3000K = 30)


ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)

IP54 RATED FITTINGS



MINIMO PRO FIXED FLAT BEZEL WITH DECORATIVE INSERT

A static recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Flat slim-line bezel with decorative insert.

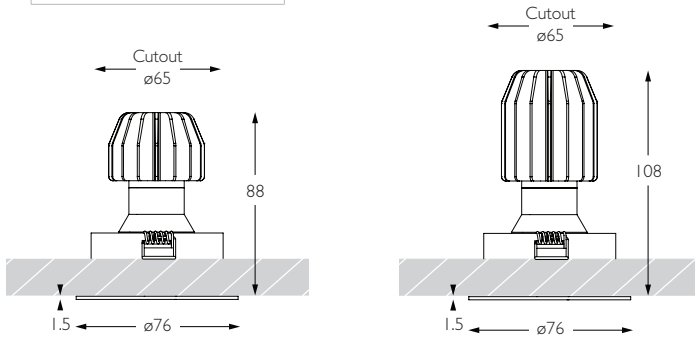


| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White Aluminium Brass Bronze Chrome |
| Adjustability | Static |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|--|--|----------|----------|--|
| RCD-605-AL-BK-YY92ZZ 💧 RCD-607-AL-BK-YY92ZZ | RCD-631-AL-BK-YY92ZZ 💧 RCD-633-AL-BK-YY92ZZ | AL AL | BK BK | |
| RCD-605-WH-WH-YY92ZZ 💧 RCD-607-WH-WH-YY92ZZ | RCD-631-WH-WH-YY92ZZ 💧 RCD-633-WH-WH-YY92ZZ | WH WH | WH WH | |
| RCD-605-WH-BK-YY92ZZ 💧 RCD-607-WH-BK-YY92ZZ | RCD-631-WH-BK-YY92ZZ 💧 RCD-633-WH-BK-YY92ZZ | WH WH | BK BK | |
| RCD-605-WH-SB-YY92ZZ 💧 RCD-607-WH-SB-YY92ZZ | RCD-631-WH-SB-YY92ZZ 💧 RCD-633-WH-SB-YY92ZZ | WH WH | SB SB | |
| RCD-605-BK-BK-YY92ZZ 💧 RCD-607-BK-BK-YY92ZZ | RCD-631-BK-BK-YY92ZZ 💧 RCD-633-BK-BK-YY92ZZ | BK BK | BK BK | |
| RCD-605-BK-SB-YY92ZZ 💧 RCD-607-BK-SB-YY92ZZ | RCD-631-BK-SB-YY92ZZ 💧 RCD-633-BK-SB-YY92ZZ | BK BK | SB SB | |
| RCD-605-RB-BK-YY92ZZ 💧 RCD-607-RB-BK-YY92ZZ | RCD-631-RB-BK-YY92ZZ 💧 RCD-633-RB-BK-YY92ZZ | RB RB | BK BK | |
| RCD-605-RB-SB-YY92ZZ 💧 RCD-607-RB-SB-YY92ZZ | RCD-631-RB-SB-YY92ZZ 💧 RCD-633-RB-SB-YY92ZZ | RB RB | SB SB | |
| RCD-605-PB-BK-YY92ZZ 💧 RCD-607-PB-BK-YY92ZZ | RCD-631-PB-BK-YY92ZZ 💧 RCD-633-PB-BK-YY92ZZ | PB PB | BK BK | |
| RCD-605-CH-BK-YY92ZZ 💧 RCD-607-CH-BK-YY92ZZ | RCD-631-CH-BK-YY92ZZ 💧 RCD-633-CH-BK-YY92ZZ | CH CH | BK BK | |




KEY
YY = COLOUR TEMPERATURE (E.G. 3000K = 30)
ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)
💧 = IP54 RATED FITTINGS



MINIMO PRO FIXED TRIMLESS BEZEL WITH DECORATIVE INSERT

A static recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Trimless with decorative insert.

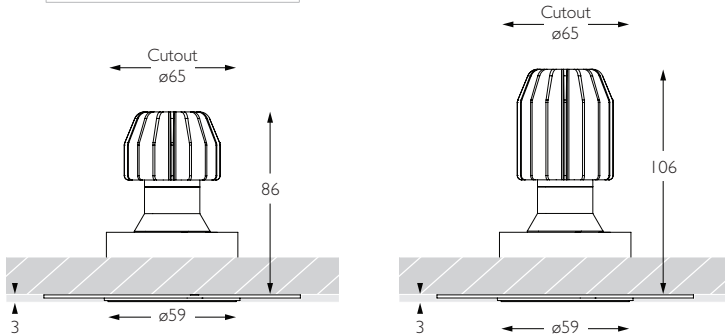

| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White Satin Brass |
| Adjustability | Static |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|--|--|------------|----------|--|
| RCT-605-WH-YY92ZZ 💧 RCT-607-WH-YY92ZZ | RCT-631-WH-YY92ZZ 💧 RCT-633-WH-YY92ZZ | N/A N/A | WH WH | |
| RCT-605-BK-YY92ZZ 💧 RCT-607-BK-YY92ZZ | RCT-631-BK-YY92ZZ 💧 RCT-633-BK-YY92ZZ | N/A N/A | BK BK | |
| RCT-605-SB-YY92ZZ 💧 RCT-607-SB-YY92ZZ | RCT-631-SB-YY92ZZ 💧 RCT-633-SB-YY92ZZ | N/A N/A | SB SB | |




KEY
YY = COLOUR TEMPERATURE (E.G. 3000K = 30)
ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)
💧 = IP54 RATED FITTINGS



MINIMO PRO FIXED FLAT BEZEL WITH PINHOLE INSERT

A static recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Flat slim-line bezel with pinhole insert.

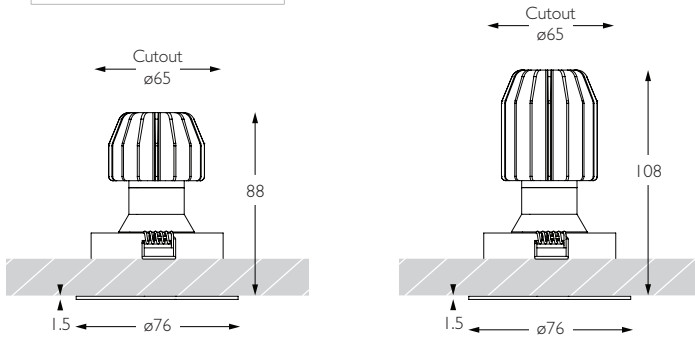

| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White |
| Adjustability | Static |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|--|--|----------|----------|--|
| RCD-606-WH-YY92ZZ 💧 RCD-608-WH-YY92ZZ | RCD-632-WH-YY92ZZ 💧 RCD-634-WH-YY92ZZ | WH WH | WH WH | |
| RCD-606-BK-YY92ZZ 💧 RCD-608-BK-YY92ZZ | RCD-632-BK-YY92ZZ 💧 RCD-634-BK-YY92ZZ | BK BK | BK BK | |




KEY
YY = COLOUR TEMPERATURE (E.G. 3000K = 30)
ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)
💧 = IP54 RATED FITTINGS



MINIMO PRO FIXED TRIMLESS WITH PINHOLE INSERT

A static recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines.
Trimless with pinhole insert.

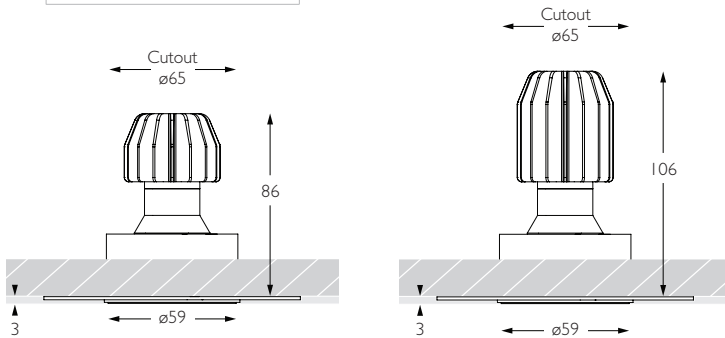

| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White |
| Adjustability | Static |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|--|--|----------|----------|--|
| RCT-606-WH-YY92ZZ 💧 RCT-608-WH-YY92ZZ | RCT-632-WH-YY92ZZ 💧 RCT-634-WH-YY92ZZ | WH WH | WH WH | |
| RCT-606-BK-YY92ZZ 💧 RCT-608-BK-YY92ZZ | RCT-632-BK-YY92ZZ 💧 RCT-634-BK-YY92ZZ | BK BK | BK BK | |




KEY
YY = COLOUR TEMPERATURE (E.G. 3000K = 30)
ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)
💧 = IP54 RATED FITTINGS



MINIMO PRO ADJUSTABLE CHAMFERED BEZEL WITH DECORATIVE INSERT

A 35° tilt, 360° rotation recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Chamfered bezel with decorative insert.

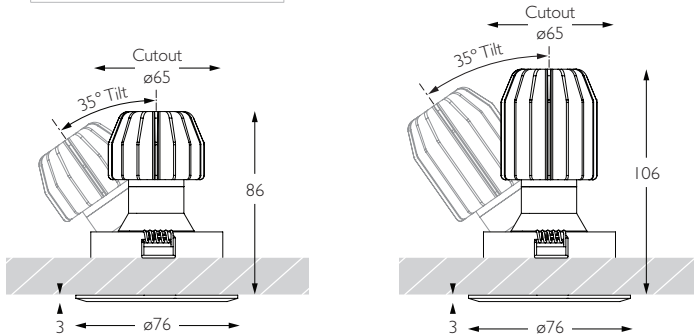

| | |
|---------------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White Aluminium Brass Bronze Chrome |
| Adjustability | 360° Rotation 35° Tilt |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

11 SERIES CODES

| |
|---------------------|
| RC-623-AL-BK-YY92ZZ |
| RC-625-AL-BK-YY92ZZ |
| RC-623-WH-WH-YY92ZZ |
| RC-625-WH-WH-YY92ZZ |
| RC-623-WH-BK-YY92ZZ |
| RC-625-WH-BK-YY92ZZ |
| RC-623-WH-SB-YY92ZZ |
| RC-625-WH-SB-YY92ZZ |
| RC-623-BK-BK-YY92ZZ |
| RC-625-BK-BK-YY92ZZ |
| RC-623-BK-SB-YY92ZZ |
| RC-625-BK-SB-YY92ZZ |
| RC-623-RB-BK-YY92ZZ |
| RC-625-RB-BK-YY92ZZ |
| RC-623-RB-SB-YY92ZZ |
| RC-625-RB-SB-YY92ZZ |
| RC-623-PB-BK-YY92ZZ |
| RC-625-PB-BK-YY92ZZ |
| RC-623-CH-BK-YY92ZZ |
| RC-625-CH-BK-YY92ZZ |

16 SERIES CODES



| |
|---------------------|
| RC-635-AL-BK-YY92ZZ |
| RC-637-AL-BK-YY92ZZ |
| RC-635-WH-WH-YY92ZZ |
| RC-637-WH-WH-YY92ZZ |
| RC-635-WH-BK-YY92ZZ |
| RC-637-WH-BK-YY92ZZ |
| RC-635-WH-SB-YY92ZZ |
| RC-637-WH-SB-YY92ZZ |
| RC-635-BK-BK-YY92ZZ |
| RC-637-BK-BK-YY92ZZ |
| RC-635-BK-SB-YY92ZZ |
| RC-637-BK-SB-YY92ZZ |
| RC-635-RB-BK-YY92ZZ |
| RC-637-RB-BK-YY92ZZ |
| RC-635-RB-SB-YY92ZZ |
| RC-637-RB-SB-YY92ZZ |
| RC-635-PB-BK-YY92ZZ |
| RC-637-PB-BK-YY92ZZ |
| RC-635-CH-BK-YY92ZZ |
| RC-637-CH-BK-YY92ZZ |

BEZEL


| |
|----|
| AL |
| AL |
| WH |
| WH |
| WH |
| WH |
| WH |
| BK |
| BK |
| BK |
| BK |
| RB |
| RB |
| RB |
| RB |
| PB |
| PB |
| CH |
| CH |

APERTURE

| |
|----|
| BK |
| BK |
| WH |
| WH |
| BK |
| BK |
| SB |
| SB |
| BK |
| BK |
| SB |
| SB |
| BK |
| BK |
| SB |
| SB |
| BK |
| BK |
| BK |
| BK |




KEY
YY = COLOUR TEMPERATURE (E.G. 3000K = 30)
ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)
= IP54 RATED FITTINGS



MINIMO PRO ADJUSTABLE FLAT BEZEL WITH DECORATIVE INSERT

A 35° tilt, 360° rotation recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Flat slim-line bezel with decorative insert.

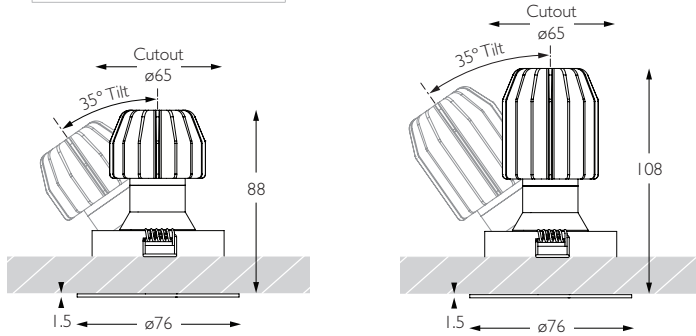

| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White Aluminium Brass Bronze Chrome |
| Adjustability | 360° Rotation 35° Tilt |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|--|--|----------|----------|--|
| RCD-623-AL-BK-YY92ZZ ▲ RCD-625-AL-BK-YY92ZZ | RCD-635-AL-BK-YY92ZZ ▲ RCD-637-AL-BK-YY92ZZ | AL AL | BK BK | |
| RCD-623-WH-WH-YY92ZZ ▲ RCD-625-WH-WH-YY92ZZ | RCD-635-WH-WH-YY92ZZ ▲ RCD-637-WH-WH-YY92ZZ | WH WH | WH WH | |
| RCD-623-WH-BK-YY92ZZ ▲ RCD-625-WH-BK-YY92ZZ | RCD-635-WH-BK-YY92ZZ ▲ RCD-637-WH-BK-YY92ZZ | WH WH | BK BK | |
| RCD-623-WH-SB-YY92ZZ ▲ RCD-625-WH-SB-YY92ZZ | RCD-635-WH-SB-YY92ZZ ▲ RCD-637-WH-SB-YY92ZZ | WH WH | SB SB | |
| RCD-623-BK-BK-YY92ZZ ▲ RCD-625-BK-BK-YY92ZZ | RCD-635-BK-BK-YY92ZZ ▲ RCD-637-BK-BK-YY92ZZ | BK BK | BK BK | |
| RCD-623-BK-SB-YY92ZZ ▲ RCD-625-BK-SB-YY92ZZ | RCD-635-BK-SB-YY92ZZ ▲ RCD-637-BK-SB-YY92ZZ | BK BK | SB SB | |
| RCD-623-RB-BK-YY92ZZ ▲ RCD-625-RB-BK-YY92ZZ | RCD-635-RB-BK-YY92ZZ ▲ RCD-637-RB-BK-YY92ZZ | RB RB | BK BK | |
| RCD-623-RB-SB-YY92ZZ ▲ RCD-625-RB-SB-YY92ZZ | RCD-635-RB-SB-YY92ZZ ▲ RCD-637-RB-SB-YY92ZZ | RB RB | SB SB | |
| RCD-623-PB-BK-YY92ZZ ▲ RCD-625-PB-BK-YY92ZZ | RCD-635-PB-BK-YY92ZZ ▲ RCD-637-PB-BK-YY92ZZ | PB PB | BK BK | |
| RCD-623-CH-BK-YY92ZZ ▲ RCD-625-CH-BK-YY92ZZ | RCD-635-CH-BK-YY92ZZ ▲ RCD-637-CH-BK-YY92ZZ | CH CH | BK BK | |




KEY
YY = COLOUR TEMPERATURE (E.G. 3000K = 30)
ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)
▲ = IP54 RATED FITTINGS



MINIMO PRO ADJUSTABLE TRIMLESS WITH DECORATIVE INSERT

A 35° tilt, 360° rotation recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Trimless with decorative insert.

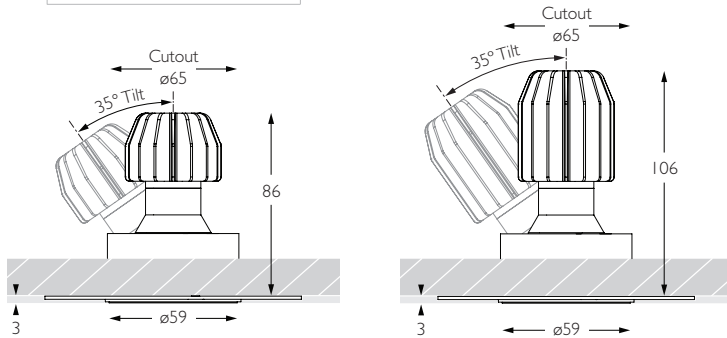

| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White Satin Brass |
| Adjustability | 360° Rotation 35° Tilt |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|---------------------|---------------------|-------|----------|--|
| RCT-623-WH-YY92ZZ | RCT-635-WH-YY92ZZ | N/A | WH | |
| 💧 RCT-625-WH-YY92ZZ | 💧 RCT-637-WH-YY92ZZ | N/A | WH | |
| RCT-623-BK-YY92ZZ | RCT-635-BK-YY92ZZ | N/A | BK | |
| 💧 RCT-625-BK-YY92ZZ | 💧 RCT-637-BK-YY92ZZ | N/A | BK | |
| RCT-623-SB-YY92ZZ | RCT-635-SB-YY92ZZ | N/A | SB | |
| 💧 RCT-625-SB-YY92ZZ | 💧 RCT-637-SB-YY92ZZ | N/A | SB | |





KEY
YY = COLOUR TEMPERATURE (E.G. 3000K = 30)
ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)
💧 = IP54 RATED FITTINGS





MINIMO PRO ADJUSTABLE FLAT BEZEL WITH PINHOLE INSERT

A 35° tilt, 360° rotation recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Flat slim-line bezel with pinhole insert.



| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White |
| Adjustability | Static |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|--|--|----------|----------|---|
| RCD-624-WH-YY92ZZ 💧 RCD-626-WH-YY92ZZ | RCD-636-WH-YY92ZZ 💧 RCD-638-WH-YY92ZZ | WH WH | WH WH |  |
| RCD-624-BK-YY92ZZ 💧 RCD-626-BK-YY92ZZ | RCD-636-BK-YY92ZZ 💧 RCD-638-BK-YY92ZZ | BK BK | BK BK |  |




KEY
YY = COLOUR TEMPERATURE (E.G. 3000K = 30)
ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)
💧 = IP54 RATED FITTINGS



MINIMO PRO ADJUSTABLE TRIMLESS WITH PINHOLE INSERT

A 35° tilt, 360° rotation recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Trimless with pinhole insert.

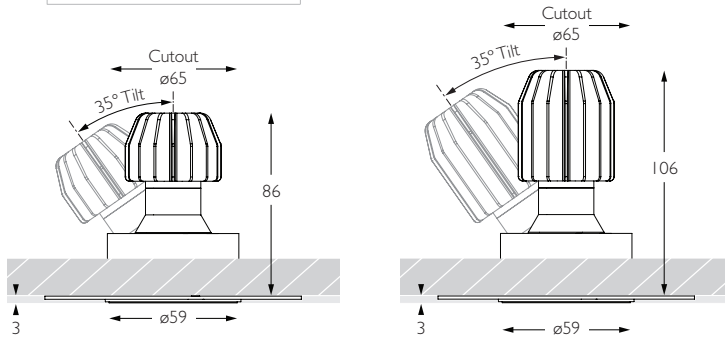

| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White |
| Adjustability | 360° Rotation 35° Tilt |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|---------------------|---------------------|-------|----------|--|
| RCT-624-WH-YY92ZZ | RCT-636-WH-YY92ZZ | N/A | WH | |
| 💧 RCT-626-WH-YY92ZZ | 💧 RCT-638-WH-YY92ZZ | N/A | WH | |
| RCT-624-BK-YY92ZZ | RCT-636-BK-YY92ZZ | N/A | BK | |
| 💧 RCT-626-BK-YY92ZZ | 💧 RCT-638-BK-YY92ZZ | N/A | BK | |



KEY

YY = COLOUR TEMPERATURE (E.G. 3000K = 30)



ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)

💧 = IP54 RATED FITTINGS



MINIMO CORE
FIXED PINHOLE

A fixed recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines.
Flat slim-line bezel with pinhole insert.



| | |
|--------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White |
| Adjustability | Static |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|-------------------|-------------------|-------|----------|--|
| RCD-628-WH-YY92ZZ | RCD-640-WH-YY92ZZ | WH | WH | |
| RCD-628-BK-YY92ZZ | RCD-640-BK-YY92ZZ | BK | BK | |



KEY

YY = COLOUR TEMPERATURE (E.G. 3000K = 30)


ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)

💧 = IP54 RATED FITTINGS



MINIMO CORE TILT PINHOLE

A 35° tiltable recessed high CRI LED luminaire with 6W (513lm) and 8.4W (665lm) light engines. Flat slim-line bezel with pinhole insert.

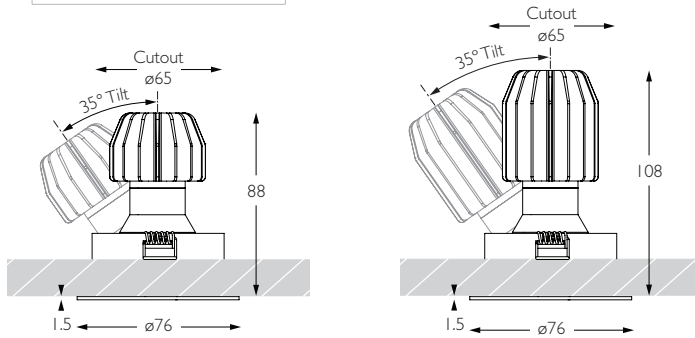

| | |
|---------------------------|---|
| Colour Temperature | 2700K 3000K |
| CRI | 92 TYP |
| Finishes | Black White |
| Adjustability | 35° Tilt - one axis |
| Power | 6W 500mA (11 Series) 8.4W 700mA (16 Series) |
| Module Output | 513lm (11 Series) 665lm (16 Series) |

| 11 SERIES CODES | 16 SERIES CODES | BEZEL | APERTURE | |
|-------------------|-------------------|-------|----------|--|
| RCD-627-WH-YY92ZZ | RCD-639-WH-YY92ZZ | WH | WH | |
| RCD-627-BK-YY92ZZ | RCD-639-BK-YY92ZZ | BK | BK | |

| | | |
|----------|--|-----------------------|
| 9 DEGREE | | PEAK INTENSITY |
| | | 11 SERIES - 11,200CD |
| | | 16 SERIES - 14,500CD |

| | | |
|-----------|--|-----------------------|
| 25 DEGREE | | PEAK INTENSITY |
| | | 11 SERIES - 1,400CD |
| | | 16 SERIES - 1,800CD |

| | | |
|-----------|--|-----------------------|
| 11 DEGREE | | PEAK INTENSITY |
| | | 11 SERIES - 8,700CD |
| | | 16 SERIES - 11,200CD |

| | | |
|-----------|--|-----------------------|
| 45 DEGREE | | PEAK INTENSITY |
| | | 11 SERIES - 470CD |
| | | 16 SERIES - 600CD |

| | | |
|-----------|--|-----------------------|
| 15 DEGREE | | PEAK INTENSITY |
| | | 11 SERIES - 4,600CD |
| | | 16 SERIES - 6,000CD |


KEY
 YY = COLOUR TEMPERATURE (E.G. 3000K = 30)
 ZZ = BEAM ANGLE (E.G. 9 DEGREE = 09)
 = IP54 RATED FITTINGS

SPECIFICATION GUIDE

MINIMO 1

In this guide **all variants** of Minimo 1 are listed; Fixed, Tilt and Eye.


Much like the product codes for the Minimo 11 and Minimo 16, the codes for Minimo 1 consist of various number and letter combinations which relate to fixture, finish, colour temperature, CRI and beam angle. A key is provided below each table to aid specification of luminaires.

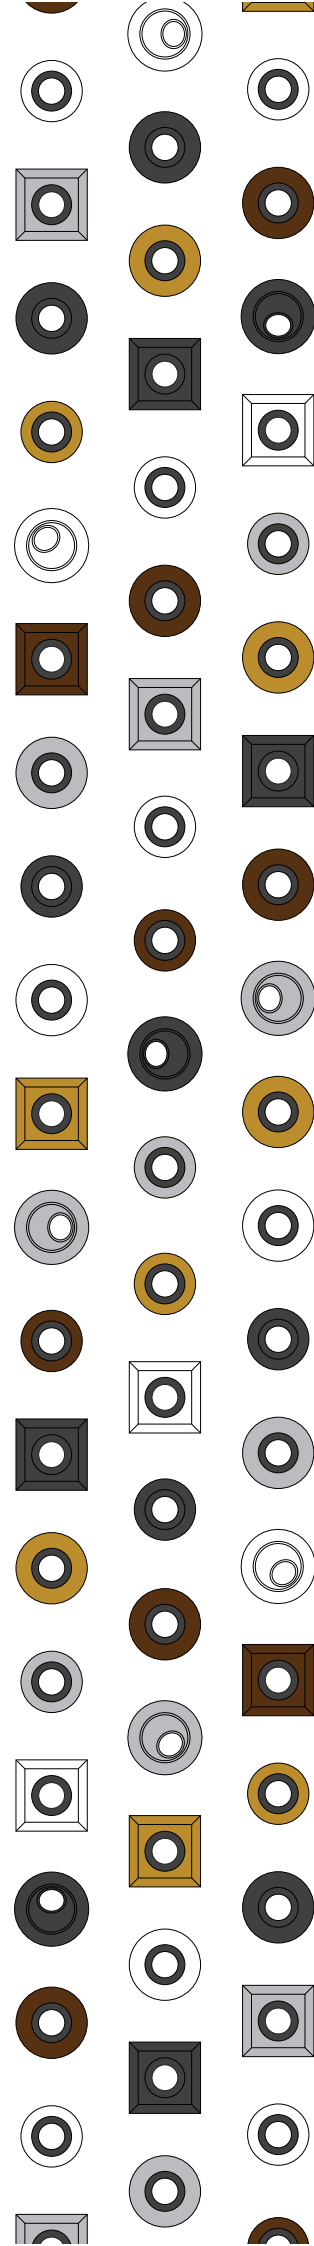





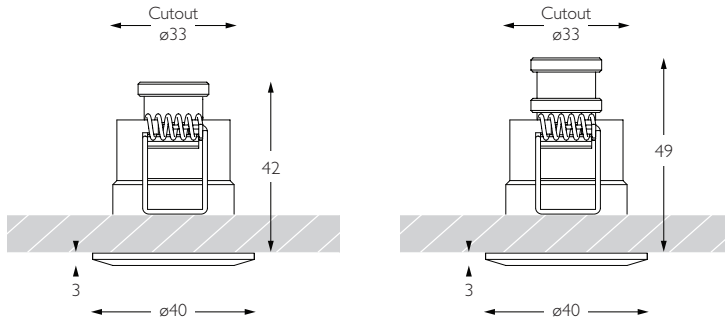


MINIMO 1 FIXED CIRCULAR AND DEEP RECESS

A fixed circular recessed high CRI LED luminaire with a 1.6W (140lm) light engine.



| | |
|---------------------------|--|
| Colour Temperature | 2700K 3000K 4000K |
| CRI | 95 |
| Finishes | Aluminium Bronze Brass Black White |
| Adjustability | Static |
| Power | 1.6W 500mA |
| Module Output | 140lm |

| STANDARD | DEEP RECESS | FINISH | |
|------------------|------------------|--------|---|
| RC-601-AL-YY9512 | RC-602-AL-YY9512 | AL | |
| RC-601-AL-YY9530 | RC-602-AL-YY9530 | AL |  |
| RC-601-AL-YY9560 | RC-602-AL-YY9560 | AL | |
| RC-601-RB-YY9512 | RC-602-RB-YY9512 | RB | |
| RC-601-RB-YY9530 | RC-602-RB-YY9530 | RB |  |
| RC-601-RB-YY9560 | RC-602-RB-YY9560 | RB | |
| RC-601-PB-YY9512 | RC-602-PB-YY9512 | PB | |
| RC-601-PB-YY9530 | RC-602-PB-YY9530 | PB |  |
| RC-601-PB-YY9560 | RC-602-PB-YY9560 | PB | |
| RC-601-BK-YY9512 | RC-602-BK-YY9512 | BK | |
| RC-601-BK-YY9530 | RC-602-BK-YY9530 | BK |  |
| RC-601-BK-YY9560 | RC-602-BK-YY9560 | BK | |
| RC-601-WH-YY9512 | RC-602-WH-YY9512 | WH | |
| RC-601-WH-YY9530 | RC-602-WH-YY9530 | WH |  |
| RC-601-WH-YY9560 | RC-602-WH-YY9560 | WH | |



KEY

YY = COLOUR TEMPERATURE (E.G. 3000K = 30)

12 = 12° BEAM ANGLE



30 = 30° BEAM ANGLE


60 = 60° BEAM ANGLE



* FOR CUSTOM BEZEL AND APERTURE FINISHES, PLEASE ENQUIRE FURTHER



Cutout
ø33



4

MINIMO 1 FIXED TRIMLESS

A fixed trimless recessed high CRI LED luminaire with a 1.6W (140lm) light engine.

| | |
|--------------------|-----------------------|
| Colour Temperature | 2700K 3000K 4000K |
| CRI | 95 |
| Finishes | Aluminium |
| Adjustability | Static |
| Power | 1.6W 500mA |
| Module Output | 140lm |

STANDARD

RCT-601-AL-YY9512
RCT-602-AL-YY9512
RCT-601-AL-YY9530
RCT-602-AL-YY9530
RCT-601-AL-YY9560
RCT-602-AL-YY9560

FINISH

AL
AL
AL
AL
AL
AL



KEY

YY = COLOUR TEMPERATURE (E.G. 3000K = 30)

12 = 12° BEAM ANGLE

30 = 30° BEAM ANGLE


60 = 60° BEAM ANGLE

* FOR CUSTOM BEZEL AND APERTURE FINISHES, PLEASE ENQUIRE FURTHER




MINIMO 1 FIXED SQUARE AND DEEP RECESS

A fixed square bezel, recessed high CRI LED luminaire with a 1.6W (140lm) light engine.

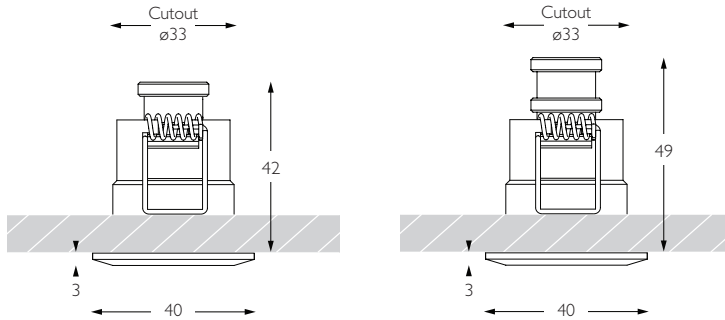

| | |
|---------------------------|--|
| Colour Temperature | 2700K 3000K 4000K |
| CRI | 95 |
| Finishes | Aluminium Bronze Brass Black White |
| Adjustability | Static |
| Power | 1.6W 500mA |
| Module Output | 140lm |

| STANDARD | DEEP RECESS | FINISH | |
|------------------|------------------|--------|--|
| RS-601-AL-YY9512 | RS-602-AL-YY9512 | AL | |
| RS-601-AL-YY9530 | RS-602-AL-YY9530 | AL | |
| RS-601-AL-YY9560 | RS-602-AL-YY9560 | AL | |
| RS-601-RB-YY9512 | RS-602-RB-YY9512 | RB | |
| RS-601-RB-YY9530 | RS-602-RB-YY9530 | RB | |
| RS-601-RB-YY9560 | RS-602-RB-YY9560 | RB | |
| RS-601-PB-YY9512 | RS-602-PB-YY9512 | PB | |
| RS-601-PB-YY9530 | RS-602-PB-YY9530 | PB | |
| RS-601-PB-YY9560 | RS-602-PB-YY9560 | PB | |
| RS-601-BK-YY9512 | RS-602-BK-YY9512 | BK | |
| RS-601-BK-YY9530 | RS-602-BK-YY9530 | BK | |
| RS-601-BK-YY9560 | RS-602-BK-YY9560 | BK | |
| RS-601-WH-YY9512 | RS-602-WH-YY9512 | WH | |
| RS-601-WH-YY9530 | RS-602-WH-YY9530 | WH | |
| RS-601-WH-YY9560 | RS-602-WH-YY9560 | WH | |



KEY

YY = COLOUR TEMPERATURE (E.G. 3000K = 30)

12 = 12° BEAM ANGLE



30 = 30° BEAM ANGLE

60 = 60° BEAM ANGLE




* FOR CUSTOM BEZEL AND APERTURE FINISHES, PLEASE ENQUIRE FURTHER



MINIMO 1 EYE

A 30° tilt, 360° rotation recessed high CRI LED luminaire with a 1.6W (140lm) light engines.



| | |
|---------------------------|---------------------------|
| Colour Temperature | 2700K 3000K 4000K |
| CRI | 95 |
| Finishes | Aluminium Black White |
| Adjustability | Pan 360° 30° Tilt |
| Power | 1.6W 500mA |
| Module Output | 140lm |

STANDARD

RC-611-AL-YY9512
RC-611-AL-YY9530
RC-611-AL-YY9560

RC-611-BK-YY9512
RC-611-BK-YY9530
RC-611-BK-YY9560

RC-611-WH-YY9512
RC-611-WH-YY9530
RC-611-WH-YY9560

FINISH

AL
AL
AL



BK
BK
BK



WH
WH
WH



KEY

YY = COLOUR TEMPERATURE (E.G. 3000K = 30)

12 = 12° BEAM ANGLE

30 = 30° BEAM ANGLE


60 = 60° BEAM ANGLE

* FOR CUSTOM BEZEL AND APERTURE FINISHES, PLEASE ENQUIRE FURTHER



MINIMO 1 TILT AND TILT TRIMLESS

A 25° tiltable recessed high CRI LED luminaire with a 1.6W (140lm) light engine. Available with trim or trimless bezels.

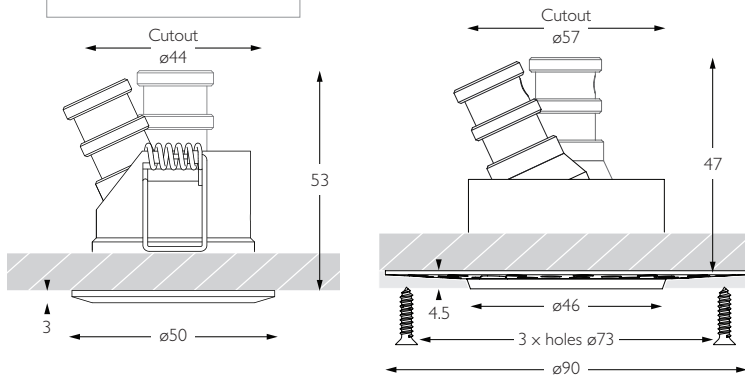

| | |
|--------------------|--|
| Colour Temperature | 2700K 3000K 4000K |
| CRI | 95 |
| Finishes | Aluminium Bronze Brass Black White |
| Adjustability | 25° Tilt |
| Power | 1.6W 500mA |
| Module Output | 140lm |

STANDARD

TRIMLESS

FINISH

RC-62I-AL-YY9512
RC-62I-AL-YY9530
RC-62I-AL-YY9560

RCT-62I-AL-YY9512
RCT-62I-AL-YY9530
RCT-62I-AL-YY9560


AL
AL
AL



RC-62I-RB-YY9512
RC-62I-RB-YY9530
RC-62I-RB-YY9560

RCT-62I-RB-YY9512
RCT-62I-RB-YY9530
RCT-62I-RB-YY9560

RB
RB
RB



RC-62I-PB-YY9512
RC-62I-PB-YY9530
RC-62I-PB-YY9560

RCT-62I-PB-YY9512
RCT-62I-PB-YY9530
RCT-62I-PB-YY9560

PB
PB
PB



RC-62I-BK-YY9512
RC-62I-BK-YY9530
RC-62I-BK-YY9560

RCT-62I-BK-YY9512
RCT-62I-BK-YY9530
RCT-62I-BK-YY9560

BK
BK
BK



RC-62I-WH-YY9512
RC-62I-WH-YY9530
RC-62I-WH-YY9560

RCT-62I-WH-YY9512
RCT-62I-WH-YY9530
RCT-62I-WH-YY9560

WH
WH
WH



KEY

YY = COLOUR TEMPERATURE (E.G. 3000K = 30)

12 = 12° BEAM ANGLE

30 = 30° BEAM ANGLE

60 = 60° BEAM ANGLE

* FOR CUSTOM BEZEL AND APERTURE FINISHES, PLEASE ENQUIRE FURTHER

All weights and measurements are believed to be correct at time of going to press.
Precision Lighting Ltd. reserves the right to modify or withdraw any of their products without notice.
Every effort has been made to ensure product colours have been reproduced accurately,
however, due to the printing process, actual colours may differ:

For complete photometric data for all of our product ranges, and the latest additions to our ranges,
check our website www.precisionlighting.co.uk.



Fixed or Adjustable





Site changeable optics - 9°, 11°, 15°, 25° and 45°



Suitable for Washrooms



1:1 Actual size

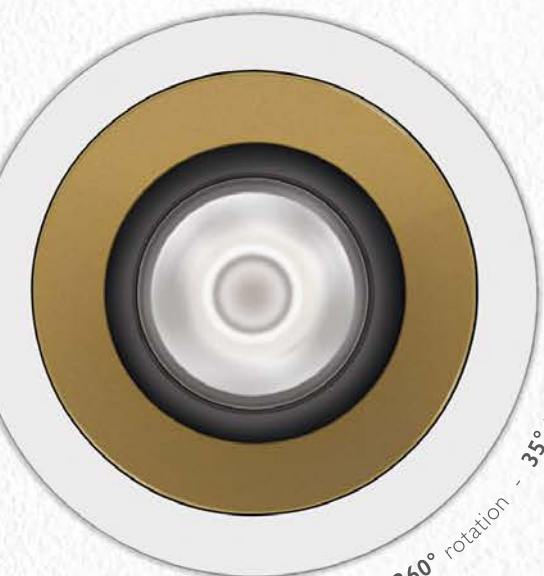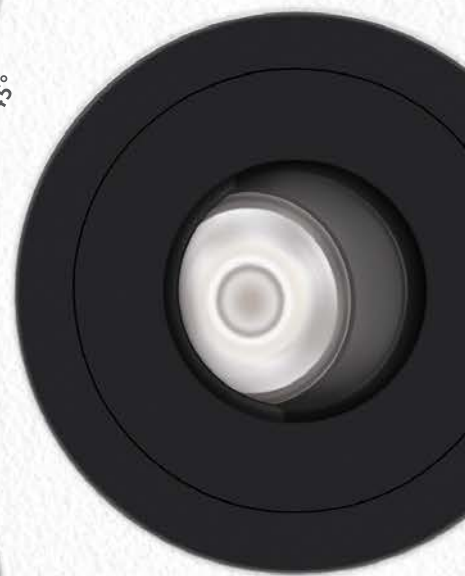

360° rotation - 35° tilt



Modular design - available Trimless



PRECISION
LIGHTING